



Plusline Large

Plusline L 1500W R7s 240V 1CT/10

Mains-voltage linear lamp giving white halogen light

PHILIPS

Product data

• General Information

Cap-Base	R7S
Bulb Shape	T11 [T 11mm]
Operating Position	P4 [Parallel +/-4D or Horizontal(HOR)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Luminous Flux (Nom)	33000 lm
Luminous Flux (Rated) (Nom)	33000 lm
Correlated Color Temperature (Nom)	2900 K
Luminous Efficacy (rated) (Nom)	22 lm/W
Color Rendering Index (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %

• Operating and Electrical

Power (Rated) (Nom)	1500.0 W
Lamp Current (Nom)	6.25 A
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	240 V

• Controls and Dimming

Dimmable	Yes
----------	-----

• Mechanical and Housing

Bulb Finish	Clear
-------------	-------

• Approval and Application

Energy Efficiency Label (EEL)	C
Energy Consumption kWh/1000 h	1500 kWh


• Luminaire Design Requirements

Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C


• Product Data

Full product code	872790080861200
Order product name	Plusline L 1500W R7s 240V 1CT/10
EAN/UPC - Product	8727900808612
Order code	923932245741
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	923932245741
Net Weight (Piece)	0.020 kg
ILCOS Code	HDG//RS-1500-240-R7s-250,7

Dimensional drawing

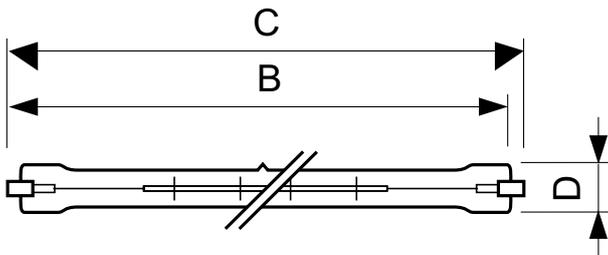

R7s, T11/T12



DEBig 1500W R7s 240V T11 CL

Product	D	B	B	B	C
Plusline L 1500W R7s 240V 1CT/10	11 mm	252.3 mm	250.7 mm	249.1 mm	254.1 mm



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 7
data subject to change